WALL TAKEOFF

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

Job Information

PREPARED FOR:	Sample: a made-up 40 x 60 shop
ADDRESS:	—
MEASURED FROM:	walls entered by hand

Product

SUPPLIER:	RoofCoil.com
SYSTEM:	PBR / R-Panel (Exposed Fastener)
COVERAGE:	36"

Walls

WALLS:	4
GROSS AREA:	3,066.67 SQFT
OPENINGS:	376.00 SQFT (4 windows, 2 doors, 2 overhead doors)
NET AREA:	2,690.67 SQFT

Panel

PANEL COUNT:	68
PANEL LNFT:	982'-0"
PANEL SQFT:	2,946.00

Notes

- Panels run plumb and are laid across each wall from its left end as you face it. Panels past windows are ordered full length and cut around them on site; the full width of a door or overhead door takes a short piece over its head. Gable and shed panels are ordered at their long side.
- Factory-formed panel at 36" coverage.
- Fastening basis: open girts at 60" o.c., a screw row on each girt.

WALL ELEVATIONS

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

Each wall as you face it from outside. Thin lines are panel seams and the numbers are the panels' ordered lengths; shaded panels are the short pieces over doors. Each wall is drawn to its own scale.

Front eave wall

Eave wall - 60'-0" long - 14'-0" high

20 panels - 532 sq ft net

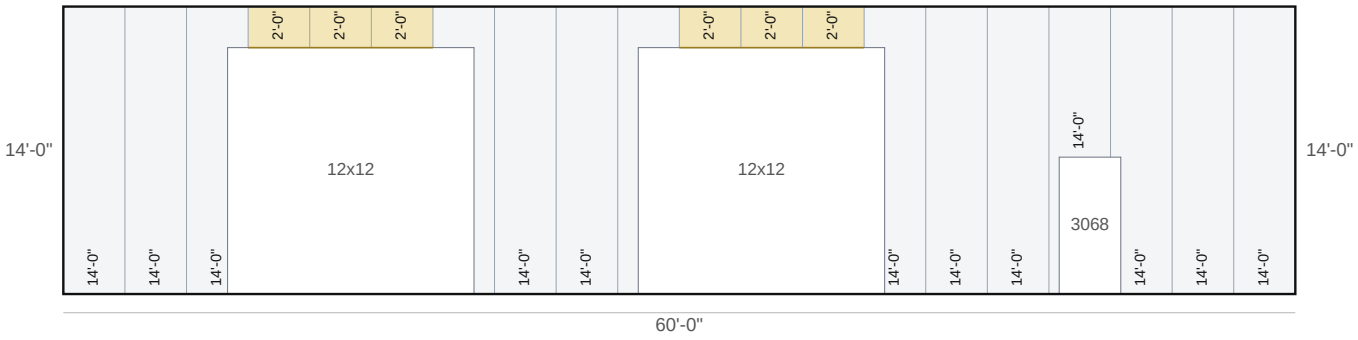

Back eave wall

Eave wall - 60'-0" long - 14'-0" high

20 panels - 804 sq ft net

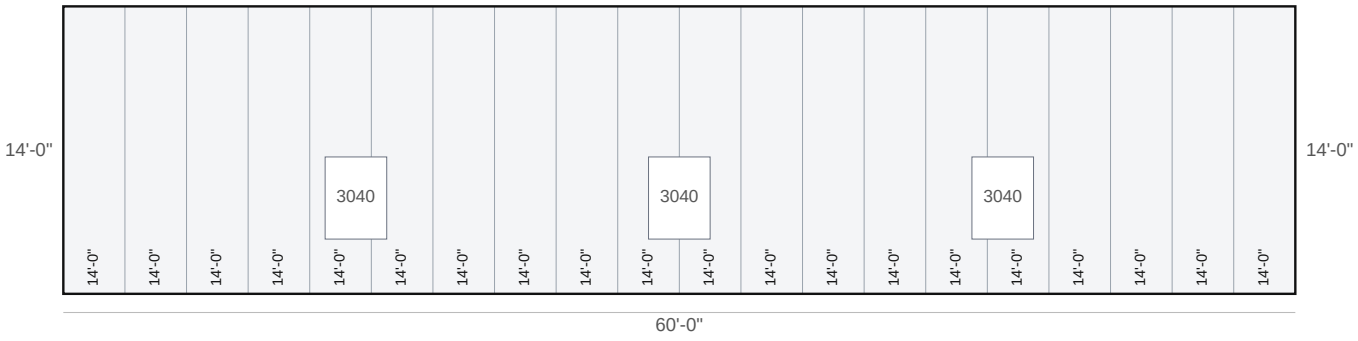

Left gable end

Gable end - 40'-0" long - 14'-0" at the ends, 20'-8" at the peak

14 panels - 661 sq ft net

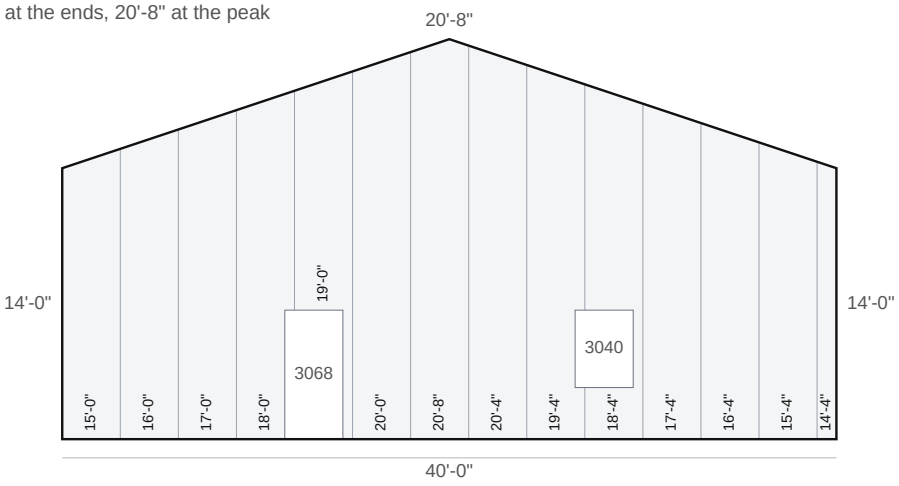

WALL ELEVATIONS

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

Right gable end

Gable end - 40'-0" long - 14'-0" at the ends, 20'-8" at the peak

14 panels - 693 sq ft net

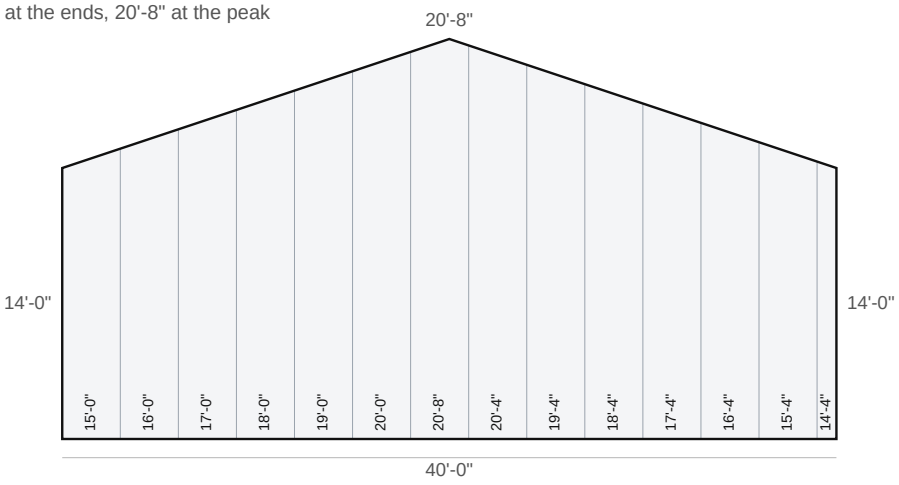

PANEL CUTLIST

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

SYSTEM: PBR / R-Panel (Exposed Fastener)
NET WALL AREA: 2,690.67 SQFT

PANEL LENGTH	QUANTITY	TOTAL LNFT	SQFT
20'-8"	2	41'-4"	124.00
20'-4"	2	40'-8"	122.00
20'-0"	2	40'-0"	120.00
19'-4"	2	38'-8"	116.00
19'-0"	2	38'-0"	114.00
18'-4"	2	36'-8"	110.00
18'-0"	2	36'-0"	108.00
17'-4"	2	34'-8"	104.00
17'-0"	2	34'-0"	102.00
16'-4"	2	32'-8"	98.00
16'-0"	2	32'-0"	96.00
15'-4"	2	30'-8"	92.00
15'-0"	2	30'-0"	90.00
14'-4"	2	28'-8"	86.00
14'-0"	34	476'-0"	1,428.00
2'-0"	6	12'-0"	36.00
TOTAL	**68**	**982'-0"**	**2,946.00**

Panels by Wall

WALL	HOW MANY	PANELS EACH	OVER DOORS	LNFT EACH
Front eave wall	1	20	6	208'-0"
Back eave wall	1	20	0	280'-0"
Left gable end	1	14	0	247'-0"
Right gable end	1	14	0	247'-0"

WALL TRIM

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

TRIM	LNFT	STICKS	WHERE
Outside corners	56.0	6	as entered
Base / drip	170.0	18	bottom of every wall, less doors and overhead doors
Top trim at the eaves	120.0	13	top of the eave walls, under the roof
Gable / rake trim	84.3	9	up the gables, along shed tops and over strips above a lower roof
Window trim	60.0	8	heads and sills 3" past each side, and both jambs
Door trim	33.7	5	head 3" past each side, and both jambs
Overhead door trim	73.0	8	head 3" past each side, and both jambs
TOTAL	**597.0**	**67**	

Sticks are 10' lengths, each run cut from whole sticks with 6" laps where a run is longer than a stick.

ITEM SUMMARY

JOB NAME: Sample shop building
JOB NUMBER: SAMPLE-WALLS
DATE: 11/4/2026

NAME	QUANTITY	UNIT	NOTE
PBR / R-Panel	982	LNFT	
Panel Screw (w/ washer)	1,058	EACH	4 across per 36" panel per row, rows 60" o.c. on the girts and at each end — tighten per wind zone
Lap Screw (stitch)	590	EACH	20" o.c. at side laps
Outside Corner Trim	6	PIECE	cut run by run from 10' sticks with 6" laps
Base Trim / Drip	18	PIECE	bottom of the walls, less doors; cut run by run from 10' sticks with 6" laps
Eave Wall Top Trim	13	PIECE	top of the eave walls, under the roof; cut run by run from 10' sticks with 6" laps
Gable Wall Trim	9	PIECE	up the gables, under the rake; cut run by run from 10' sticks with 6" laps
Window Trim (J)	8	PIECE	heads, sills and jambs; cut run by run from 10' sticks with 6" laps
Door Trim (J)	5	PIECE	heads and jambs; cut run by run from 10' sticks with 6" laps
Overhead Door Trim	8	PIECE	head and jambs; cut run by run from 10' sticks with 6" laps
Inside Closure (base)	170	LNFT	
Outside Closure (eave walls)	120	LNFT	
1" XLP Screws (trim)	1,911	EACH	
Sealant, Color-Matched	9	TUBE	167 @ 20 each — round every door and window; 20 lnft of bead per tube
House Wrap 9' x 150'	3	ROLL	3373 +10% waste @ 1350 each — the wall's water-resistive barrier (IRC R703.2) — leave off if the walls are already wrapped