JOB DETAILS

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Job Information

PREPARED FOR:	RoofCoil sample takeoff
ADDRESS:	Sample L-shaped hip roof
SOURCE FILE:	l-roof.xml

Product

SUPPLIER:	RoofCoil.com
SYSTEM:	SS450 – 1.5" Snap-Lock
COVERAGE:	16.875"
ROOF AREA:	2,079.54 SQFT

SUMMARY

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Panel

SYSTEM:	SS450 – 1.5" Snap-Lock
PANEL COUNT:	156
PANEL LNFT:	1576'-0"
PANEL SQFT:	2,216.25
ROOF AREA:	2,079.54 SQFT
COVERAGE:	16.875"

Assemblies

RIDGE:	48.00 LNFT
HIP:	90.00 LNFT
VALLEY:	30.00 LNFT
EAVE:	176.00 LNFT
RAKE:	22.36 LNFT

PANELS LAYOUT

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Numbered marker = the end of each facet where installation starts · arrow = installation direction · panels labeled with cut lengths; a thin line leads to a length moved off a crowded panel. Lengths with no room on the drawing are listed in the Panel Installation Order.

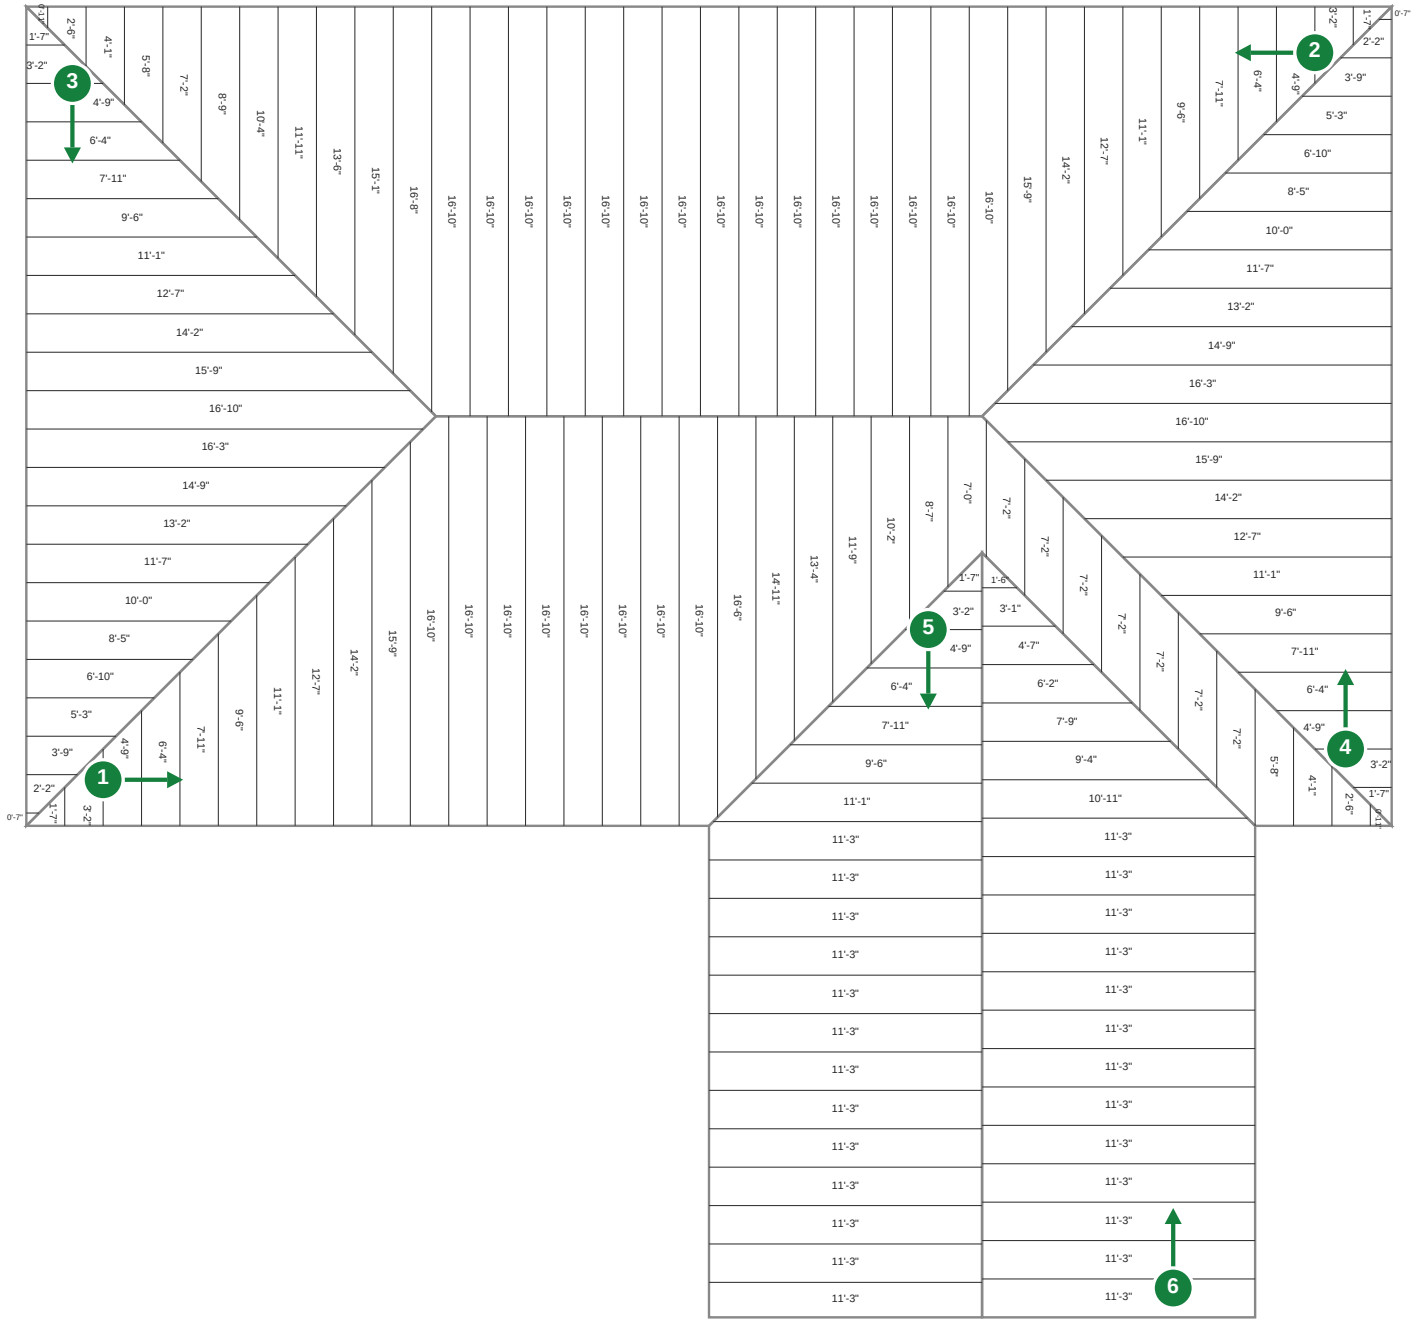

PANEL CUTLIST

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

SYSTEM: SS450 – 1.5" Snap-Lock
COVERAGE: 16.875"
SURFACE AREA: 2,079.54 SQFT

PANEL LENGTH	QUANTITY	TOTAL LNFT	SQFT
16'-10"	25	420'-10"	591.80
16'-8"	1	16'-8"	23.44
16'-6"	1	16'-6"	23.20
16'-3"	2	32'-6"	45.70
15'-9"	4	63'-0"	88.59
15'-1"	1	15'-1"	21.21
14'-11"	1	14'-11"	20.98
14'-9"	2	29'-6"	41.48
14'-2"	4	56'-8"	79.69
13'-6"	1	13'-6"	18.98
13'-4"	1	13'-4"	18.75
13'-2"	2	26'-4"	37.03
12'-7"	4	50'-4"	70.78
11'-11"	1	11'-11"	16.76
11'-9"	1	11'-9"	16.52
11'-7"	2	23'-2"	32.58
11'-3"	26	292'-6"	411.33
11'-1"	5	55'-5"	77.93
10'-11"	1	10'-11"	15.35
10'-4"	1	10'-4"	14.53
10'-2"	1	10'-2"	14.30
10'-0"	2	20'-0"	28.13
9'-6"	5	47'-6"	66.80
9'-4"	1	9'-4"	13.13
8'-9"	1	8'-9"	12.30
8'-7"	1	8'-7"	12.07
8'-5"	2	16'-10"	23.67
7'-11"	5	39'-7"	55.66
7'-9"	1	7'-9"	10.90
7'-2"	8	57'-4"	80.63
7'-0"	1	7'-0"	9.84
6'-10"	2	13'-8"	19.22
6'-4"	5	31'-8"	44.53
6'-2"	1	6'-2"	8.67
5'-8"	2	11'-4"	15.94
5'-3"	2	10'-6"	14.77
4'-9"	5	23'-9"	33.40
4'-7"	1	4'-7"	6.45
4'-1"	2	8'-2"	11.48
3'-9"	2	7'-6"	10.55
3'-2"	5	15'-10"	22.27
3'-1"	1	3'-1"	4.34
2'-6"	2	5'-0"	7.03
2'-2"	2	4'-4"	6.09
1'-7"	5	7'-11"	11.13
1'-6"	1	1'-6"	2.11

PANEL CUTLIST

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

PANEL LENGTH	QUANTITY	TOTAL LNFT	SQFT
0'-11"	2	1'-10"	2.58
0'-7"	2	1'-2"	1.64
TOTAL	**156**	**1576'-0"**	**2,216.25**

PANEL INSTALLATION ORDER

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Panels are listed in installation order for each facet. On the Panels Layout page, the numbered green marker sits at the end of each facet where installation starts, and the arrow points in the direction of installation.

Facet 1 — 36 panels, 367'-1"

1. 1'-7"	2. 3'-2"	3. 4'-9"	4. 6'-4"
5. 7'-11"	6. 9'-6"	7. 11'-1"	8. 12'-7"
9. 14'-2"	10. 15'-9"	11. 16'-10"	12. 16'-10"
13. 16'-10"	14. 16'-10"	15. 16'-10"	16. 16'-10"
17. 16'-10"	18. 16'-10"	19. 16'-6"	20. 14'-11"
21. 13'-4"	22. 11'-9"	23. 10'-2"	24. 8'-7"
25. 7'-0"	26. 7'-2"	27. 7'-2"	28. 7'-2"
29. 7'-2"	30. 7'-2"	31. 7'-2"	32. 7'-2"
33. 5'-8"	34. 4'-1"	35. 2'-6"	36. 0'-11"

Facet 2 — 36 panels, 435'-11"

1. 1'-7"	2. 3'-2"	3. 4'-9"	4. 6'-4"
5. 7'-11"	6. 9'-6"	7. 11'-1"	8. 12'-7"
9. 14'-2"	10. 15'-9"	11. 16'-10"	12. 16'-10"
13. 16'-10"	14. 16'-10"	15. 16'-10"	16. 16'-10"
17. 16'-10"	18. 16'-10"	19. 16'-10"	20. 16'-10"
21. 16'-10"	22. 16'-10"	23. 16'-10"	24. 16'-10"
25. 16'-10"	26. 16'-8"	27. 15'-1"	28. 13'-6"
29. 11'-11"	30. 10'-4"	31. 8'-9"	32. 7'-2"
33. 5'-8"	34. 4'-1"	35. 2'-6"	36. 0'-11"

Facet 3 — 22 panels, 196'-5"

1. 1'-7"	2. 3'-2"	3. 4'-9"	4. 6'-4"
5. 7'-11"	6. 9'-6"	7. 11'-1"	8. 12'-7"
9. 14'-2"	10. 15'-9"	11. 16'-10"	12. 16'-3"
13. 14'-9"	14. 13'-2"	15. 11'-7"	16. 10'-0"
17. 8'-5"	18. 6'-10"	19. 5'-3"	20. 3'-9"
21. 2'-2"	22. 0'-7"		

Facet 4 — 22 panels, 196'-5"

1. 1'-7"	2. 3'-2"	3. 4'-9"	4. 6'-4"
5. 7'-11"	6. 9'-6"	7. 11'-1"	8. 12'-7"
9. 14'-2"	10. 15'-9"	11. 16'-10"	12. 16'-3"
13. 14'-9"	14. 13'-2"	15. 11'-7"	16. 10'-0"
17. 8'-5"	18. 6'-10"	19. 5'-3"	20. 3'-9"
21. 2'-2"	22. 0'-7"		

Facet 5 — 20 panels, 190'-7"

1. 1'-7"	2. 3'-2"	3. 4'-9"	4. 6'-4"
5. 7'-11"	6. 9'-6"	7. 11'-1"	8. 11'-3"
9. 11'-3"	10. 11'-3"	11. 11'-3"	12. 11'-3"
13. 11'-3"	14. 11'-3"	15. 11'-3"	16. 11'-3"
17. 11'-3"	18. 11'-3"	19. 11'-3"	20. 11'-3"

Facet 6 — 20 panels, 189'-7"

1. 11'-3"	2. 11'-3"	3. 11'-3"	4. 11'-3"
5. 11'-3"	6. 11'-3"	7. 11'-3"	8. 11'-3"
9. 11'-3"	10. 11'-3"	11. 11'-3"	12. 11'-3"
13. 11'-3"	14. 10'-11"	15. 9'-4"	16. 7'-9"
17. 6'-2"	18. 4'-7"	19. 3'-1"	20. 1'-6"

ITEM SUMMARY

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

NAME	QUANTITY	UNIT	NOTE
SS450 – 1.5" Snap-Lock Panel	1,576	LNFT	
Flat sheets for trim (4' × 10')	16	SHEET	see Trim From Flat Sheet
SG-114-24-SL Clips	1	BOX	788 pcs @ 800/pack — 1 clip per 2' of seam — tighten for wind zone
1" XLP Pancake Screws (clips)	788	EACH	1 per clip
1" XLP Screws (trim, cleats & Z-closures)	827	EACH	1 per ft of drip edge and of cleat; 2 per panel at each Z-closure (2.84/lnft of ridge & hip at 16.88" coverage)
1" Butyl Tape	7	ROLL	276 @ 45 each — under the Z-closures only, both sides of ridges and hips; 45' rolls
Sealant, Color-Matched	4	TUBE	78 @ 20 each — 20 lnft of bead per tube
Synthetic Underlayment 42"	3	ROLL	2287 +10% waste @ 1000 each
Plastic Cap Nails	1	BOX	1040 pcs @ 2000/pack — "H1 nail per 2 sqft of underlayment
Palisade SA-HT Ice & Water (valleys)	1	ROLL	30 @ 66 each — 2-sq roll "H 66 lnft at 36" width

TRIM FROM FLAT SHEET

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Each trim line as the piece the shop's trim drawing tool bends, cut lengthwise from 4' × 10' flat sheet: pieces per sheet = 48" ÷ girth, rounded down to whole pieces; sheets = pieces ÷ pieces per sheet, rounded up, one row per part as the shop orders it — lines bent as the same part share its sheets.

PROFILE	PART · FOR	PIECES	GIRTH	PER SHEET	SHEETS
	Eave / Drip Edge 3" x 2" · ½" 45° kick for Eave Trim — the cleated eave: the panels hook the Eave Cleat	19	6.00"	8	**3**
	**Offset Cleat** 1" x 3/8" x 1½" for Eave Cleat + Offset Cleat — Offset Cleat: both edges of the valleys	25	2.875"	16	**2**
	**Rake / Gable Trim** 3" x 5½" · ½" 45° kick for Gable / Rake Trim	3	9.50"	5	**1**
	**Ridge Cap** 5" legs · bent to 6:12 for Ridge / Hip Cap	5	12.00"	4	**2**
	**Hip Cap** 5" legs · hip angle for 6:12 for Ridge / Hip Cap	10	12.00"	4	**3**
	**Z-Closure** 1" x 1.5" x 1" for Z-Closure	28	3.50"	13	**3**
	**W-Valley — Cleated** 10" wings · 1" diverter · flat edges for Valley Trim (W-Valley) — cleated: an Offset Cleat runs along each edge	4	22.50"	2	**2**

Total flat sheets: 16 (4' × 10')

TRIM MAP

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

Where each part goes: every roof edge that takes trim is drawn in the color of its kind, and the key names the parts that go on it. Pieces and flat sheets are on the Trim From Flat Sheet page.

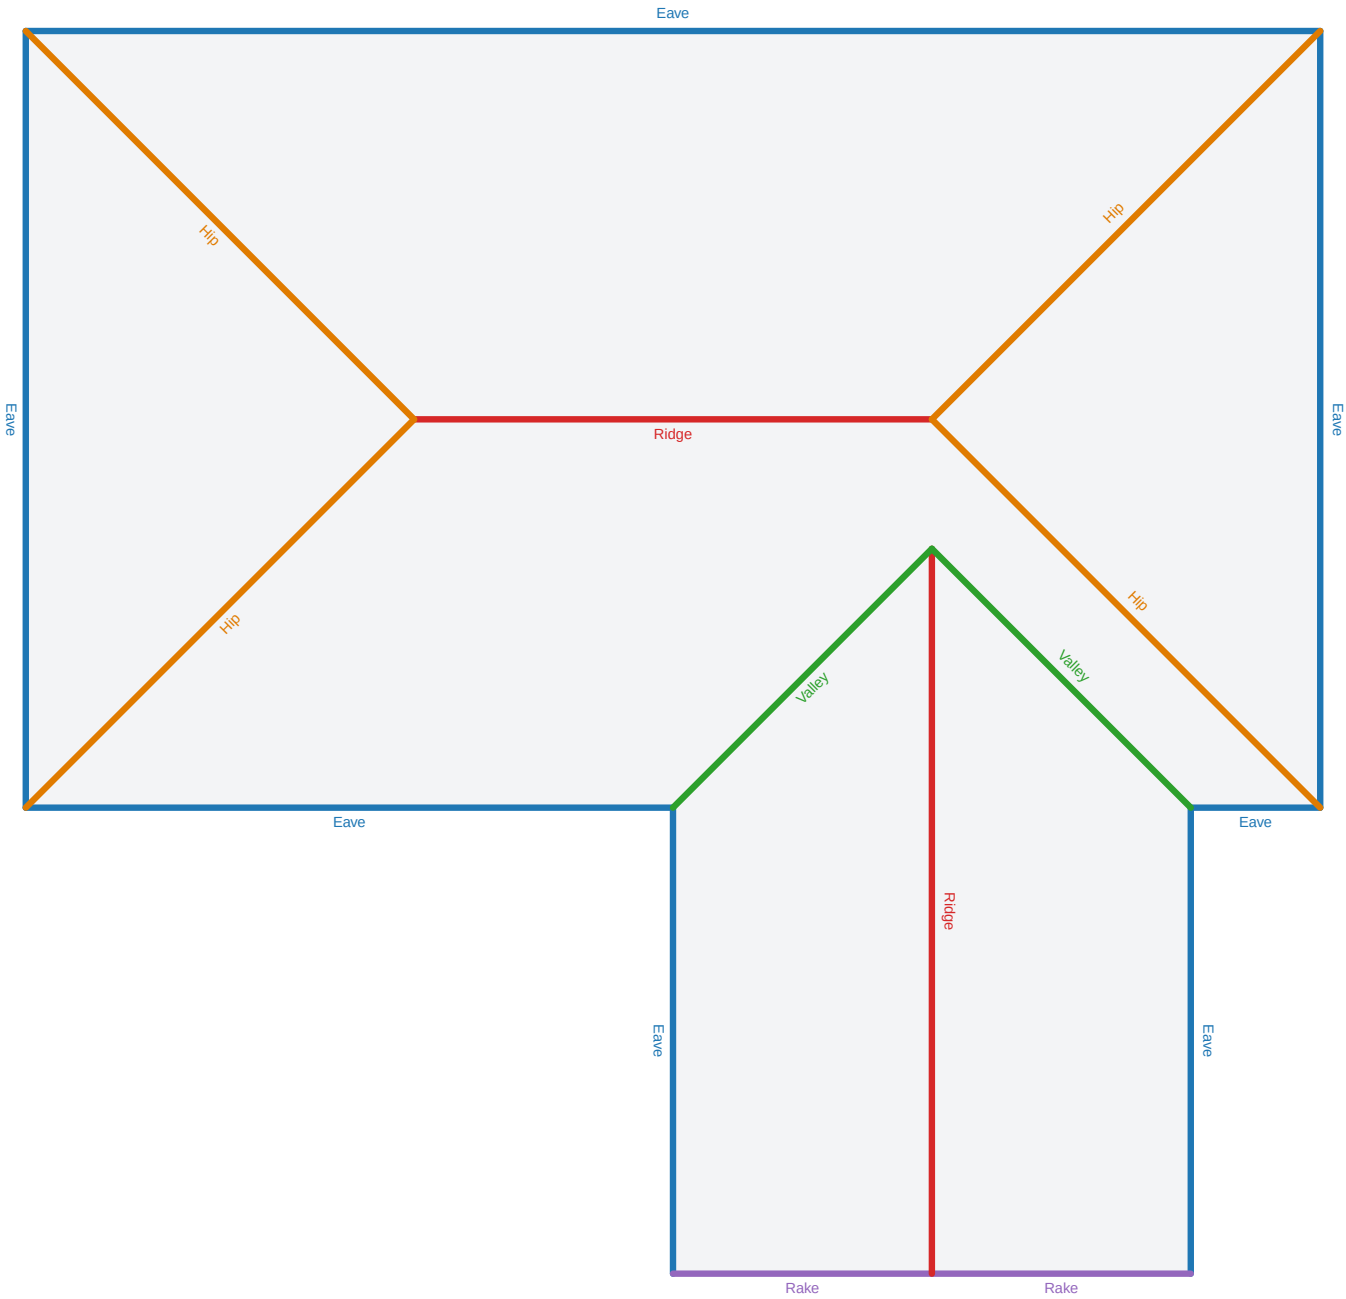

Eave — 176.00 LNFT
Eave / Drip Edge · Offset Cleat

Ridge — 48.00 LNFT
Ridge Cap · Z-Closure

Valley — 30.00 LNFT
W-Valley — Cleated · Offset Cleat

Rake — 22.36 LNFT
Rake / Gable Trim

Hip — 90.00 LNFT
Hip Cap · Z-Closure

ISOMETRICS LAYOUT

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

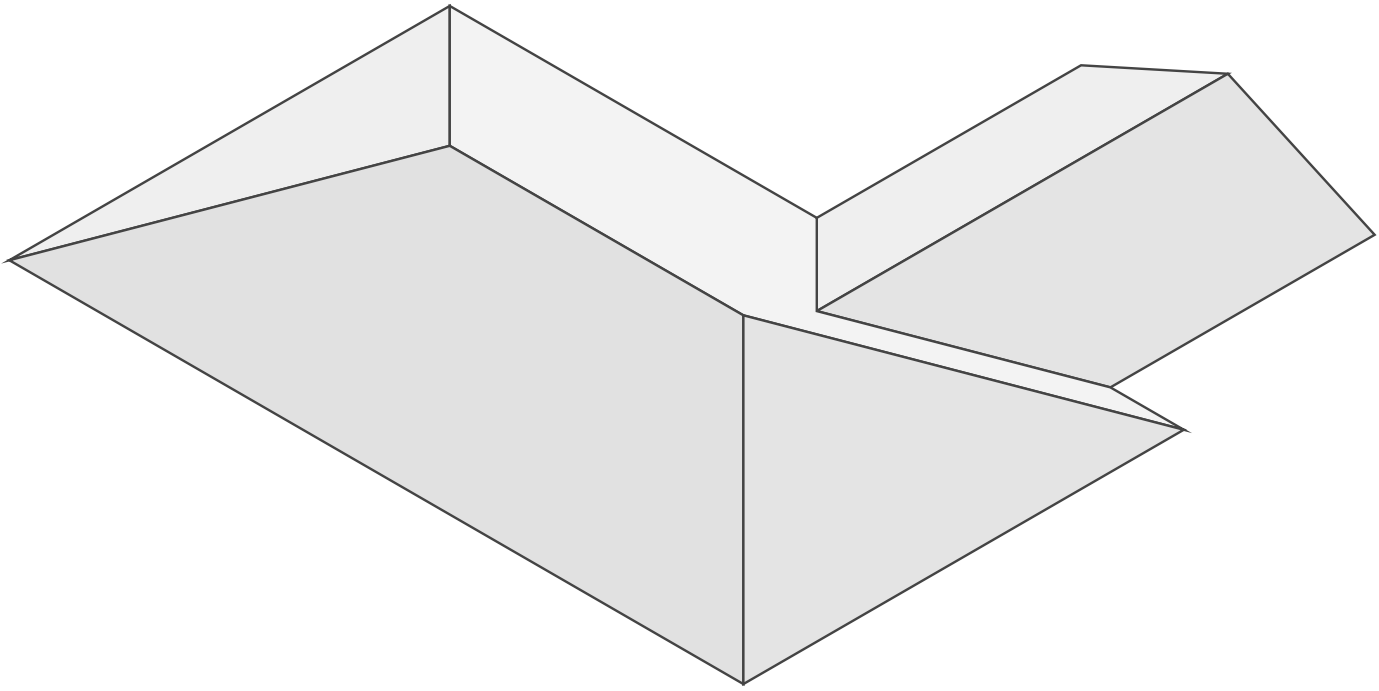

DIMENSIONS LAYOUT

JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04

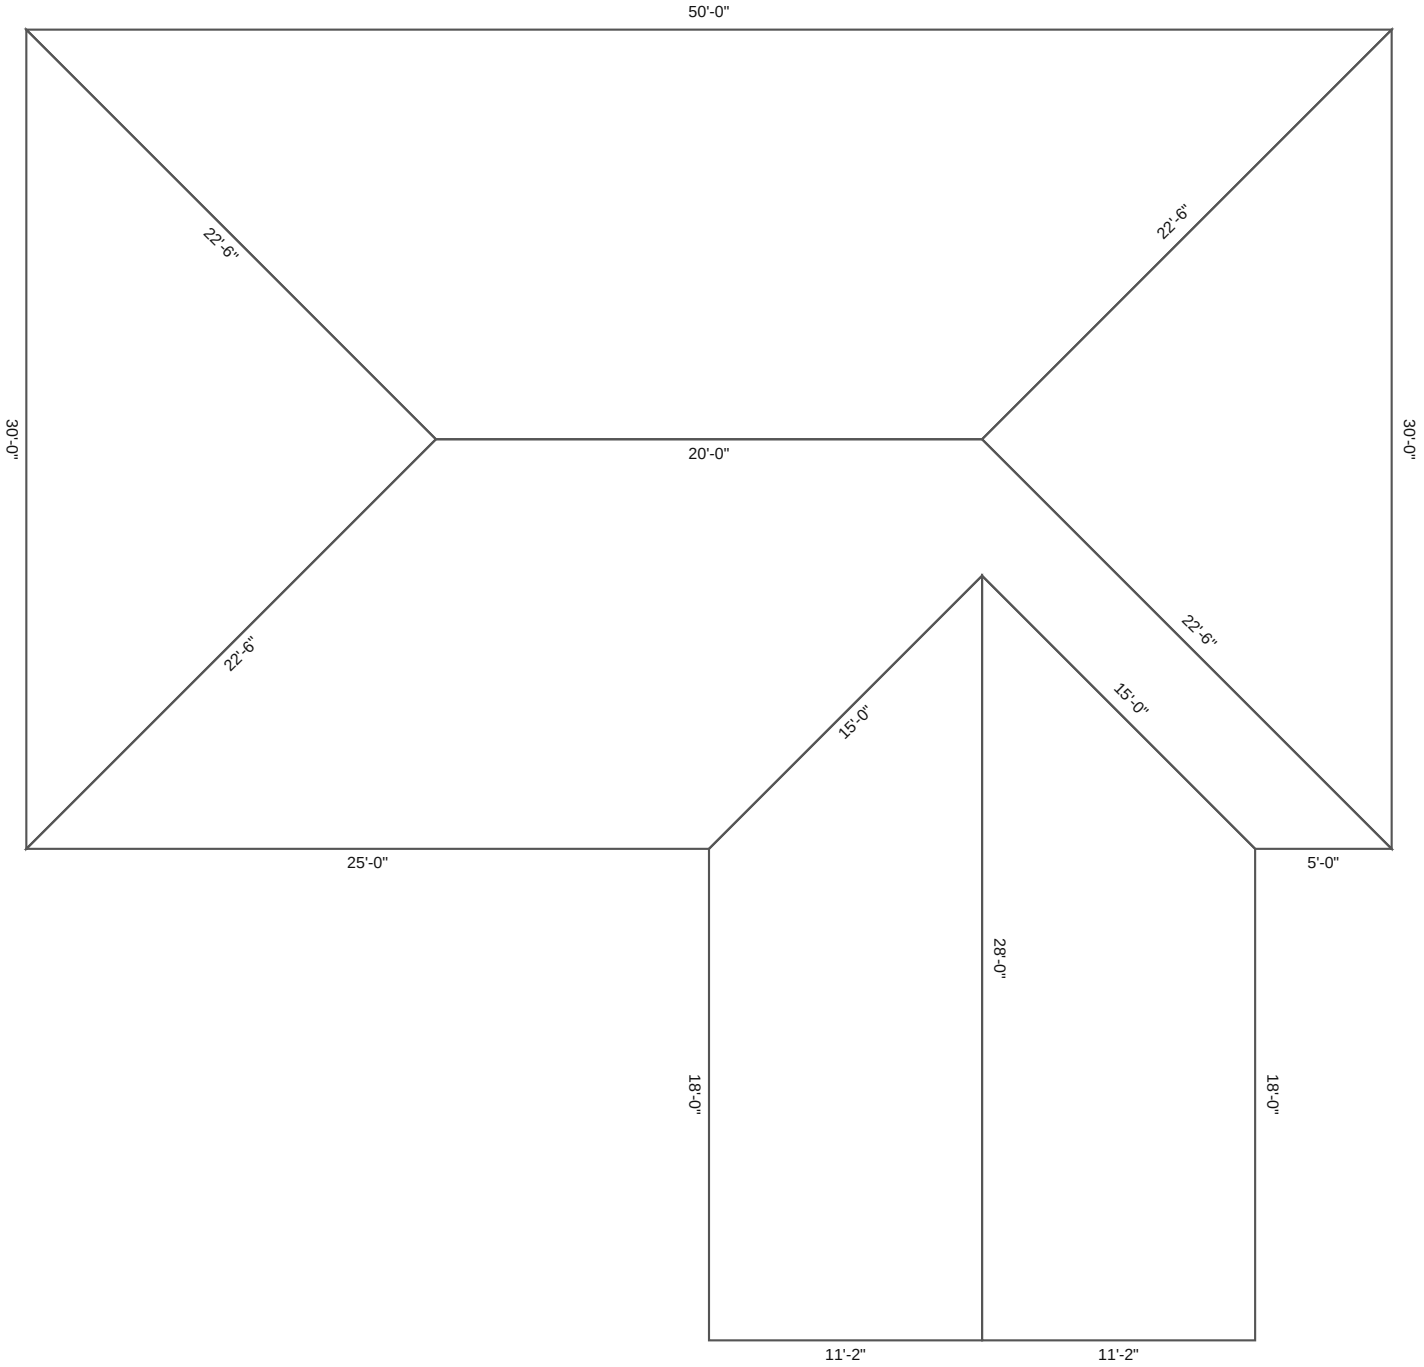

SLOPES LAYOUT
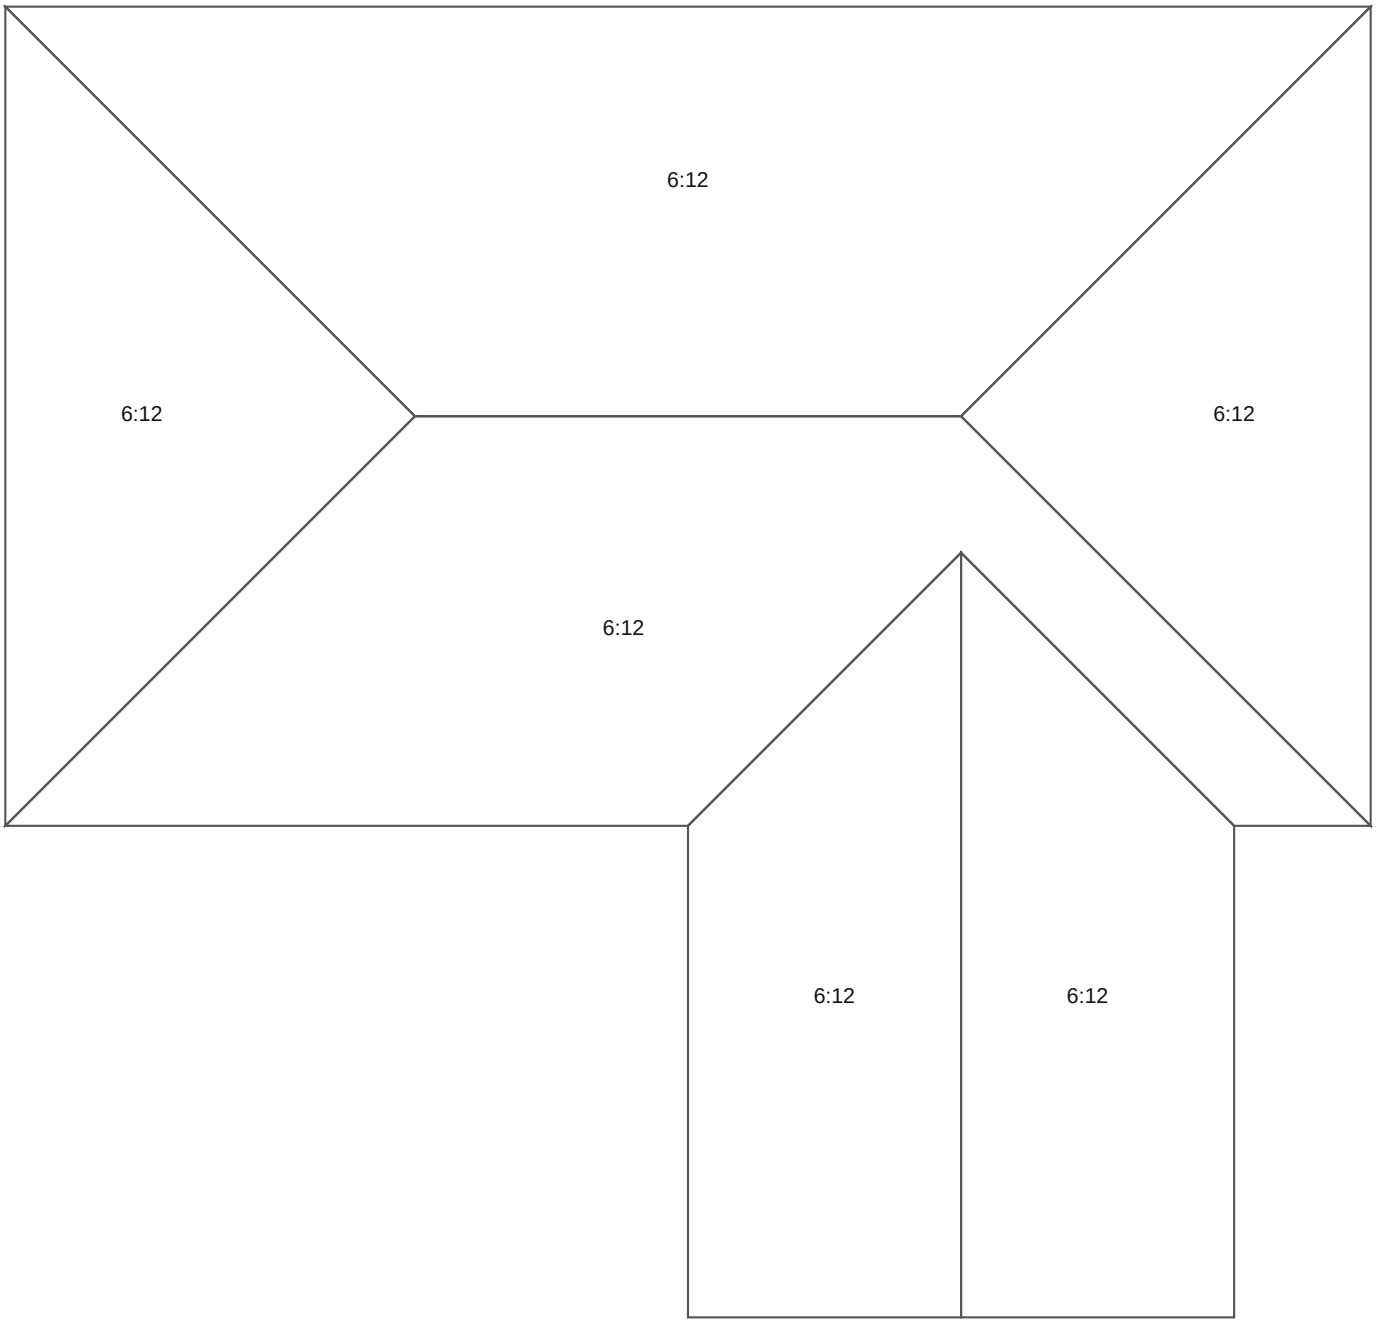
JOB NAME: Sample L-shaped hip roof
JOB NUMBER: SAMPLE
DATE: 2026-11-04